

## GENERAL INFORMATION

Pipes made of borosilicate glass 3.3 in the ball and socket (KF) and flat safety flange systems (PF) have been tried and tested for decades and are particularly well established in the chemical and pharmaceutical industry.

The main reasons for this are that

- Borosilicate glass 3.3 has special qualities, such as transparency, and, when combined with PTFE as a sealing material it has almost universal chemical stability.
- Pipes made of borosilicate glass 3.3 on the basis of a modular system in accordance with EN 12585 (with basic measurement of 25 mm and many that deviate slightly from this measurement or have slight adaptations), which are standardised in metric units, ensuring structural components can be replaced easily. The result has been numerous improvements to subsequent structural components whilst still maintaining the same level of compatibility.

In addition to the standard component system to be described in the following, client-specific structural components in special lengths and sizes are possible.

- Borosilicate glass 3.3 is an accepted material for the construction of pressure vessels and has been tried and tested over decades – both optimised pipe ends and flange couplings in the ball and socket (KF) and flat safety flange (PF) systems are evidence for this. Both flange systems are described in detail in chapter 10 “technical information” (see following figures). They form the basis of the structural components in this catalogue and are also available to purchase as parallel systems. This means clients can continue to use the flange system they have already established or, alternatively, choose the flange system which corresponds to their needs.



All the fundamental facts and information on the construction of pipes and apparatus using borosilicate glass are included in chapter 10 “technical information”.

Here you will find details about:

- Properties of borosilicate glass 3.3
- Flange systems and pipe ends in PF and KF systems as well as the corresponding certificates, such as approval by the Technical Guidelines on Air Quality Control (TA-Luft) for the coupling system.
- Approved operating conditions
- Labelling of structural components

- Coating of structural components
- Weight of structural components
- ATEX applications
- GMP applications
- Mounting and assembly of pipes and apparatus
- Safety regulations

In principle the following types of flange are used in PF and KF systems with article numbers ending in F1 to F4.


Flange shape				
Symbol				
	F1 Grooved ball flange (KF)	F2 Grooved socket flange (KF)	F3 Flat grooved flange (KF)	F4 Flat safety flange (PF)

To help identify the ends of flanges the type of flange is entered at the end of each item number, for example “-F44” for pipe sections in the PF system. The order of the flange details is also important in clearly identifying many structural components. The numbering DN 1, DN 2, etc is used for these structural components on the relevant catalogue drawing. Flange types should be entered in the item number according to this order, for example “-F121” for the T piece in the example below.

To simplify things, standard items from the flat safety flange system mentioned in the catalogue are given a label ending in “...P” and from the KF system “...K”.

This catalogue concentrates on structural components in the flat safety flange system (PF).


Spaces are used for readability, but are not part of the item number.

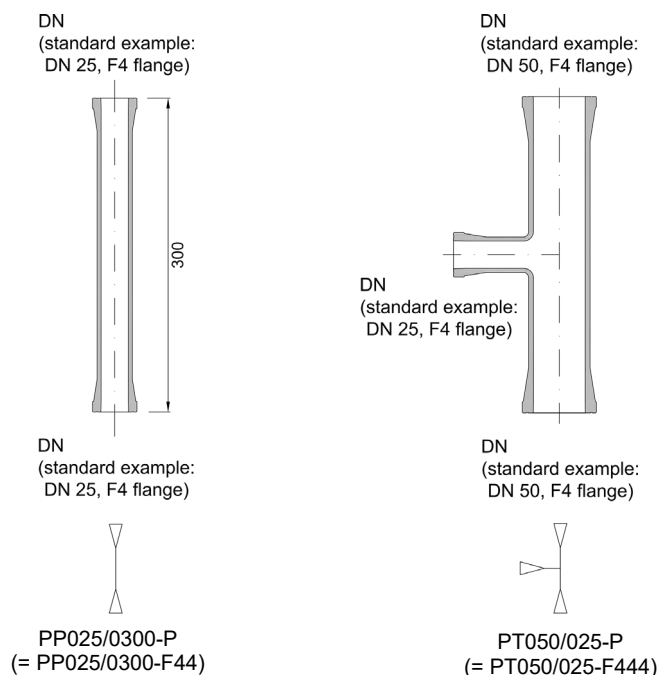

## PIPES

In the following table standard pipe sections in accordance with EN 12585 are listed for the nominal diameters (DN) of 15 – 600. The flat safety flange system (PF) is manufactured up to a nominal diameter of 150 as a cone flange including shoulder and groove, and from a nominal diameter of 200 as a standard flange in the implementation of plans in groove flange systems, as shown in the drawing below.



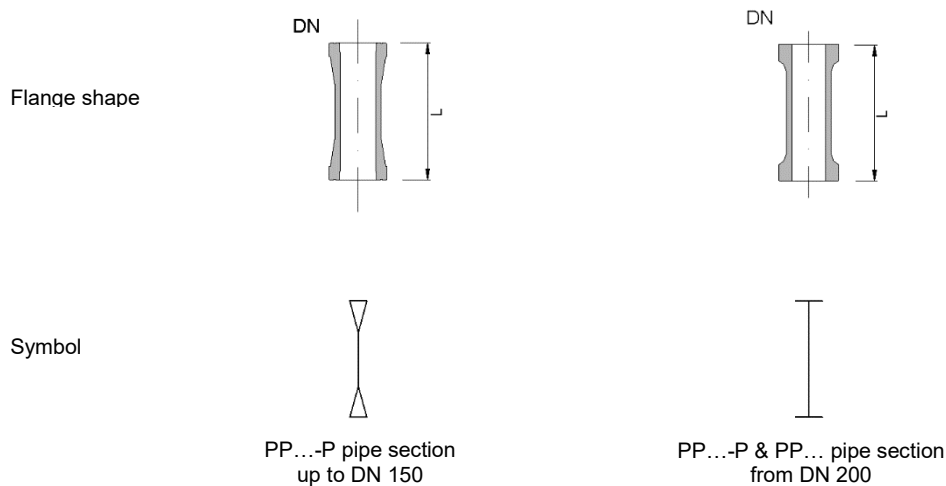



The designs dependent on the nominal diameter are presented in the following figure and the rows of the table are labelled with the corresponding symbols.









You can find more information on types of pipe end which are dependent on nominal diameter in chap. 10 “technical information” as well as on the corresponding flange couplings and sealing gaskets in chap 2 “couplings”.

We will be happy to deliver all further flange combinations with the KF system or special lengths and optional extras such as coatings. For this you need to add the optional extra digits to the item number as given at the end of the chapter. Several options can be chosen and they are presented as far as possible in alphabetical order. In the following table you will find examples of item numbering for optional extras.

<b>Product name:</b>	<b>Item number</b>	<b>Examples</b>
Pipe section with special length, for example 265 mm:	PP DN/length-P	PP 100/0265-P
Pipe section with flange combination joining KF to PF:	PP DN/length-F14 PP DN/length-F24	PP 100/0150-F14 PP 100/0150-F24
Pipe section with coating:	PP DN/length-...-C...	PP 100/0500-P-C3
Pipe section with 2.2 material certificate:	PP DN/length...-Z2	PP 100/0500-P-Z2
Pipe section with coating and 2.2 material certificate:	PP DN/length...-C.-Z2	PP 100/0500-P-C3-Z2
Pipe section with continuous minimal inner diameter:	PP DN/length-...-O1	PP 100/0500-P-O1
Pipe section with calibrated inner diameter:	PP DN/length-...-O2	PP 100/0500-P-O2


Length [mm]	Item no. DN 15	Item no. DN 25	Item no. DN 40	Item no. DN 50	Item no. DN 80	Item no. DN100
						
75	PP 015/0075-P	PP 025/0075-P	-	-	-	-
100	PP 015/0100-P	PP 025/0100-P	PP 040/0100-P	PP 050/0100-P	-	-
125	PP 015/0125-P	PP 025/0125-P	PP 040/0125-P	PP 050/0125-P	PP 080/0125-P	-
150	PP 015/0150-P	PP 025/0150-P	PP 040/0150-P	PP 050/0150-P	PP 080/0150-P	PP 100/0150-P
175	PP 015/0175-P	PP 025/0175-P	PP 040/0175-P	PP 050/0175-P	PP 080/0175-P	PP 100/0175-P
200	PP 015/0200-P	PP 025/0200-P	PP 040/0200-P	PP 050/0200-P	PP 080/0200-P	PP 100/0200-P
250	PP 015/0250-P	PP 025/0250-P	PP 040/0250-P	PP 050/0250-P	PP 080/0250-P	PP 100/0250-P
300	PP 015/0300-P	PP 025/0300-P	PP 040/0300-P	PP 050/0300-P	PP 080/0300-P	PP 100/0300-P
400	PP 015/0400-P	PP 025/0400-P	PP 040/0400-P	PP 050/0400-P	PP 080/0400-P	PP 100/0400-P
500	PP 015/0500-P	PP 025/0500-P	PP 040/0500-P	PP 050/0500-P	PP 080/0500-P	PP 100/0500-P
700	PP 015/0700-P	PP 025/0700-P	PP 040/0700-P	PP 050/0700-P	PP 080/0700-P	PP 100/0700-P
1000	PP 015/1000-P	PP 025/1000-P	PP 040/1000-P	PP 050/1000-P	PP 080/1000-P	PP 100/1000-P
1500	PP 015/1500-P	PP 025/1500-P	PP 040/1500-P	PP 050/1500-P	PP 080/1500-P	PP 100/1500-P
2000	PP 015/2000-P	PP 025/2000-P	PP 040/2000-P	PP 050/2000-P	PP 080/2000-P	PP 100/2000-P
3000	-	-	PP 040/3000-P	PP 050/3000-P	PP 080/3000-P	PP 100/3000-P

Length [mm]	Item no. DN 150	Item no. DN 200	Item no. DN 300	Item no. DN 400	Item no. DN 450	Item no. DN600
						
150	PP 150/0150-P	-	-	-	-	-
175	PP 150/0175-P	-	-	-	-	-
200	PP 150/0200-P	-	-	-	-	-
250	PP 150/0250-P	-	-	-	-	-
300	PP 150/0300-P	PP 200/0300-P	PP 300/0300-P	-	-	-
400	PP 150/0400-P	-	-	-	-	-
500	PP 150/0500-P	PP 200/0500-P	PP 300/0500-P	PP 400/0500	PP 450/0500	PP 600/0500
700	PP 150/0700-P	-	-	-	-	-
1000	PP 150/1000-P	PP 200/1000-P	PP 300/1000-P	PP 400/1000	PP 450/1000	PP 600/1000
1500	PP 150/1500-P	PP 200/1500-P	PP 300/1500-P	PP 400/1500	PP 450/1500	PP 600/1500
2000	PP 150/2000-P	PP 200/2000-P	PP 300/2000-P	PP 400/2000	PP 450/2000	PP 600/2000
3000	PP 150/3000-P	-	-	-	-	-

## SPACERS AND ADAPTOR PIECES

Spacers are used to balance out small differences in length and to join different types of flange by clamping the corresponding flange couplings together.

Types of spacer, related symbols and the item numbers for PF couplings or PF to KF couplings are shown in the following diagrams and tables.

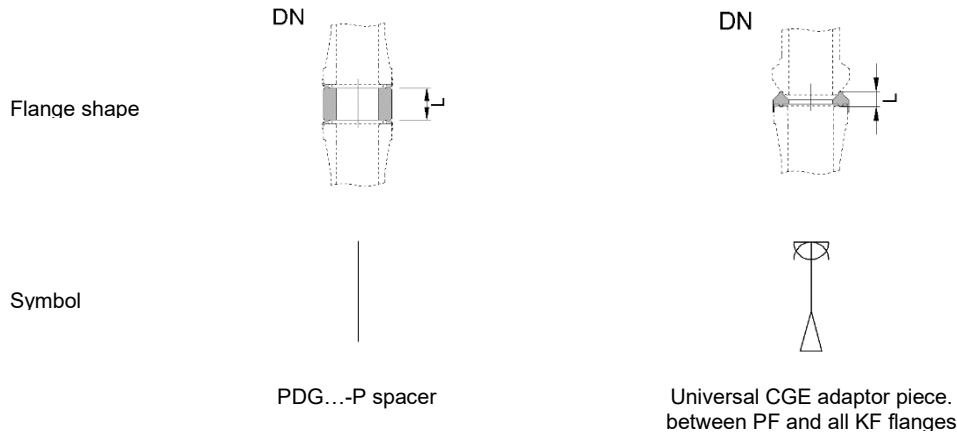

An additional sealing gasket and bolt of a size corresponding to the length of the spacer should be planned in for flange couplings for the most regularly used PDG type glass spacers. The additional length in mm is marked by entering option "L" after the item number. Examples of this are also shown in the following table. More detailed information on the above-mentioned flange couplings and sealing gaskets can be found in chap. 2 "couplings".

"CGE..." adaptor pieces are not intended to balance out the length between the PF and KF flange coupling systems but to function as a joint which presents a universal alternative to type "PP .../...-F14" or „PP .../...-F24" und „PP.../...-F34" pipe sections. When fitting, the centering collar must be put on the pipe end with the flat safety flange. In order to join the structural components a special coupling is needed as shown in the table.

We will be happy to deliver all further flange combinations and optional extras such as coatings. For this you need to add the optional extra digits to the item number as given at the end of the chapter.


Product name:	Item no.	Examples Spacer	Example Transition coupling
Spacer, glass, special length 30 mm	PDG DN/length-P	PDG 100/030-P	CP 100-P-L0030
Glass spacer, joint KF to PF:	PDG DN/length-F14	PDG 100/050-F14	CP 100-PK-L0050
	PDG DN/length-F24	PDG 100/050-F24	CP 100-PK-L0050
Glass spacer with coating:	PDG DN/length-P-C...	PDG 100/050-P-C3	CP 100-P-L0050
Adaptor piece, PTFE, KF to PF:	CGE DN	CGE 050	CP 050-PK-L0010

## PDG type spacers

Length [mm]	Item no. DN 15	Item no. DN 25	Item no. DN 40	Item no. DN 50
10	PDG 015/010-P	PDG 025/010-P	PDG 040/010-P	PDG 050/010-P
15	PDG 015/015-P	PDG 025/015-P	PDG 040/015-P	PDG 050/015-P
20	PDG 015/020-P	PDG 025/020-P	PDG 040/020-P	PDG 050/020-P
25	PDG 015/025-P	PDG 025/025-P	PDG 040/025-P	PDG 050/025-P
50	PDG 015/050-P	PDG 025/050-P	PDG 040/050-P	PDG 050/050-P
75	-	-	PDG 040/075-P	PDG 050/075-P

Length [mm]	Item no. DN 80	Item no. DN 100	Item no. DN 150	Item no. DN 200
10	PDG 080/010-P	PDG 100/010-P	PDG 150/010-P	-
15	PDG 080/015-P	-	-	-
20	PDG 080/020-P	PDG 100/020-P	PDG 150/020-P	-
25	PDG 080/025-P	-	-	-
50	PDG 080/050-P	PDG 100/050-P	PDG 150/050-P	PDG 200/050-P
75	PDG 080/075-P	PDG 100/075-P	PDG 150/075-P	
100	PDG 080/100-P	PDG 100/100-P	PDG 150/100-P	PDG 200/100-P
125	-	PDG 100/125-P	PDG 150/125-P	-

## CGE type adaptor pieces

DN	Length [mm]	Item no. Adaptor piece	Special transition coupling (For details see chap. 3 »couplings«)
			
15	6	CGE 015	CP 015-PK-L0005
25	7	CGE 025	CP 025-PK-L0010
40	8	CGE 040	CP 040-PK-L0010
50	8	CGE 050	CP 050-PK-L0010
80	10	CGE 080	CP 080-PK-L0010

**REDUCERS**



Reducers are available in symmetrical and eccentric designs.




Normally the symmetrical “PR...” shape is used. For specific applications, for example for minimising dead volume in horizontal piping with a nominal diameter transition or for more compact designs in vertical piping, “PRE ...” eccentric reducers are used. Eccentric reducers are available in standard up to DN 150. If larger nominal diameters are needed please contact one of our specialist departments.

The measurements for reducers can be seen in the following table.

We will be glad to deliver optional extras such as coatings and special flange combinations. For this you need to add the optional extra digits to the item number as given at the end of the chapter.


<b>Product name:</b>	<b>Item no.</b>	<b>Example</b>
Symmetrical reducers, PF system:	PR DN1/DN2-P	PR 100/050-P
	PR DN1/DN2-F31	PR 200/050-F31
Eccentric reducers, PF system:	PRE DN1/DN2-P	PRE 100/050-P

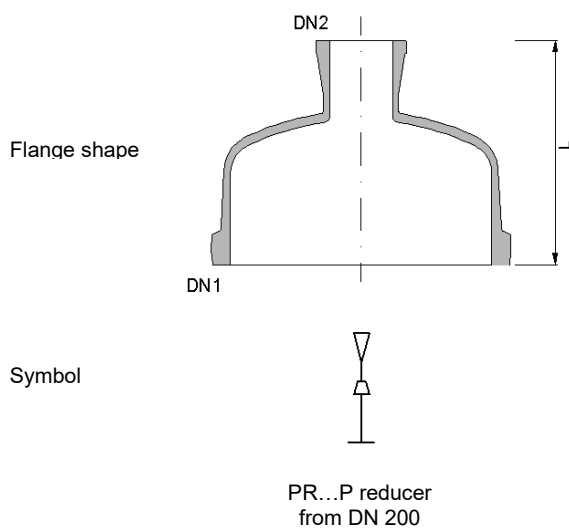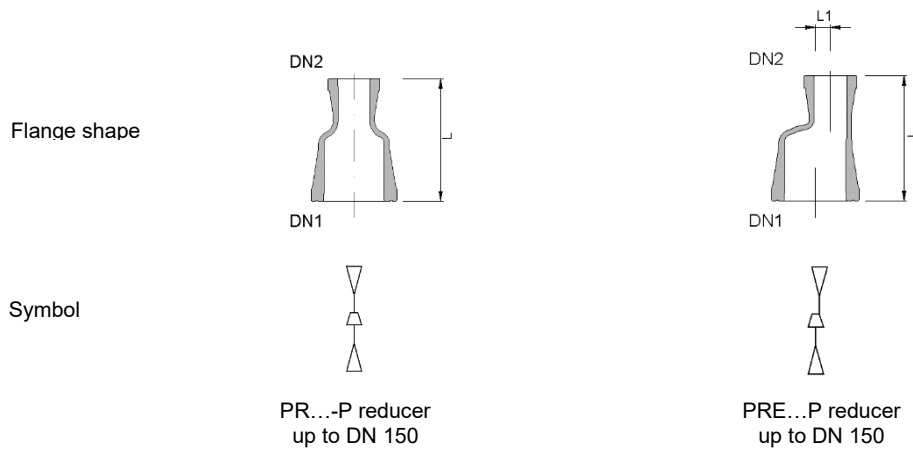

DN1	DN2	L	L1	Item no.	Item no.
-	-	[mm]	[mm]	Symmetrical reducer	Eccentric reducer
					
25	15	100	5	PR 025/015-P	PRE 025/015-P
40	15	100	11	PR 040/015-P	PRE 040/015-P
40	25	100	6	PR 040/025-P	PRE 040/025-P
50	15	100	17	PR 050/015-P	PRE 050/015-P
50	25	100	12	PR 050/025-P	PRE 050/025-P
50	40	100	6	PR 050/040-P	PRE 050/040-P
80	25	125	24	PR 080/025-P	PRE 080/025-P
80	40	125	18	PR 080/040-P	PRE 080/040-P
80	50	125	12	PR 080/050-P	PRE 080/050-P
100	25	150	39	PR 100/025-P	PRE 100/025-P
100	40	150	33	PR 100/040-P	PRE 100/040-P
100	50	150	27	PR 100/050-P	PRE 100/050-P
100	80	150	15	PR 100/080-P	PRE 100/080-P
150	25	200	63	PR 150/025-P	PRE 150/025-P
150	40	200	57	PR 150/040-P	PRE 150/040-P
150	50	200	52	PR 150/050-P	PRE 150/050-P
150	80	200	40	PR 150/080-P	PRE 150/080-P
150	100	200	25	PR 150/100-P	PRE 150/100-P
					
200	25	175		PR 200/025-P	
200	40	200*		PR 200/040-P	
200	50	200*		PR 200/050-P	
200	80	200		PR 200/080-P	
200	100	200		PR 200/100-P	
200	150	200		PR 200/150-P	
300	25	225		PR 300/025-P	
300	40	225		PR 300/040-P	
300	50	225		PR 300/050-P	
300	80	250		PR 300/080-P	
300	100	250		PR 300/100-P	
300	150	275		PR 300/150-P	
300	200	250		PR 300/200-P	




DN1	DN2	L	L1	Item no.
-	-	[mm]	[mm]	Symmetrical reducer



400	25	300		<b>PR 400/025-P</b>
400	40	300		<b>PR 400/040-P</b>
400	50	300		<b>PR 400/050-P</b>
400	80	300		<b>PR 400/080-P</b>
400	100	300		<b>PR 400/100-P</b>
400	150	300		<b>PR 400/150-P</b>
400	200	300		<b>PR 400/200-P</b>
400	300	300		<b>PR 400/300-P</b>



450	25	325		<b>PR 450/025-P</b>
450	40	325		<b>PR 450/040-P</b>
450	50	325		<b>PR 450/050-P</b>
450	80	325		<b>PR 450/080-P</b>
450	100	350		<b>PR 450/100-P</b>
450	150	350		<b>PR 450/150-P</b>
450	200	325		<b>PR 450/200-P</b>
450	300	325		<b>PR 450/300-P</b>



600	50	375		<b>PR 600/050-P</b>
600	80	375		<b>PR 600/080-P</b>
600	100	400		<b>PR 600/100-P</b>
600	150	425		<b>PR 600/150-P</b>
600	200	400		<b>PR 600/200-P</b>
600	300	400		<b>PR 600/300-P</b>


\* Lengths which deviate from previous standard lengths

**BENDS**

Standard bends are available with 45° and 90° angles and in smaller nominal diameters with a 180° angle (as a U bend). In addition to these standard angles, a range of special angles are offered, in particular 10°, 30° and 80°. For bends with these angles please enter the angle you would like in the item number as shown in the example below.

In addition to these standard bends, space-saving PBR type reducing bends and PBT type bends with temperature connectors are offered as standard variants of 90° bends.

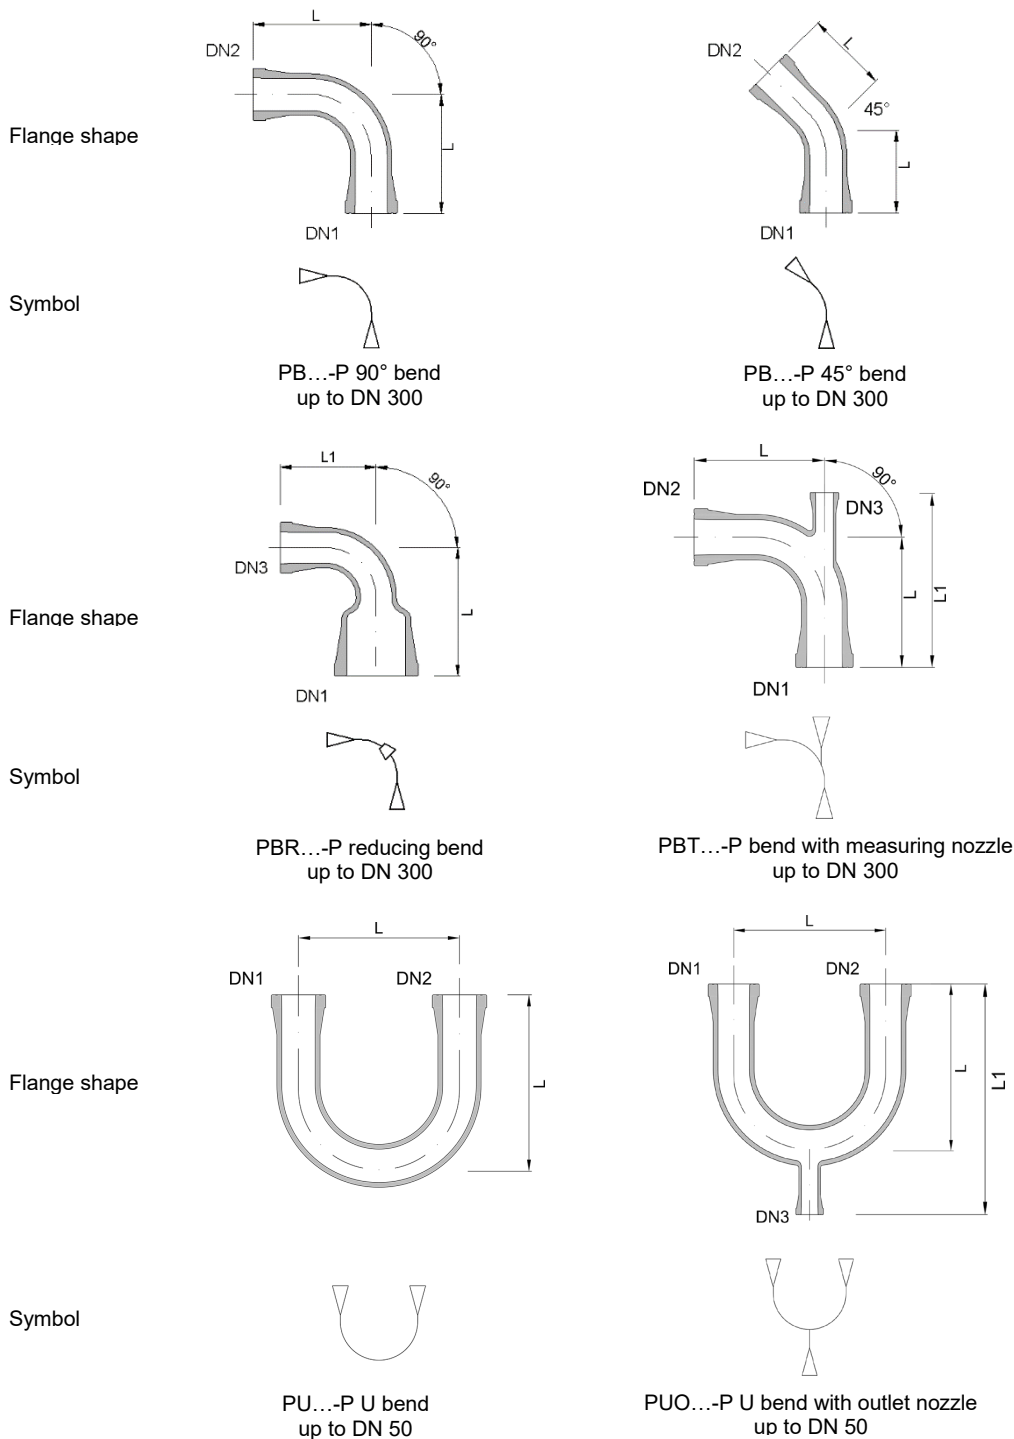

U bends are available in the standard version with an outlet nozzle (PUO type) and without an outlet nozzle (PU type). They are typically used to ventilate pipes or to make liquid seals with a outlet in distillate pipes in columns





The measurements for bends can be seen in the following table. The item code is:



Product name:	Item no.	Example
90° bend, PF system:	PB 90/DN1-P	PB 90/050-P
90° reducing bend, PF system:	PBR DN1/DN2-P	PBR 100/050-P
90° bend with temperature connector, PF system:	PBT 90/DN1-P	PBT 90/100-P
Bend, PF system, elbow design 80°:	PB 80/DN1-P	PB 80/050-P
90° bend, PF system, conductive coating:	PB 90/DN1-P-C3	PB 90/050-P-C3
U bend, PF system:	PU DN1-P	PU 050-P
U bend with outlet, PF system:	PUO DN1/DN2-P	PUO 050/025-P

**Bends 45° / 90°**

DN1,2 DN3	L	L1	Item no.	Item no.
-	-	[mm]	45 ° bend	90° bend
				
15	50		<b>PB 45/015-P</b>	<b>PB 90/015-P</b>
25	75		<b>PB 45/025-P</b>	
25	100			<b>PB 90/025-P</b>
25	15	100	50	<b>PBR 025/015-P</b>
40	100		<b>PB 45/040-P</b>	
40	150			<b>PB 90/040-P</b>
40	25	125	100	<b>PBR 040/025-P</b>
50	100		<b>PB 45/050-P</b>	
50	150			<b>PB 90/050-P</b>
50	25	150	100	<b>PBR 050/025-P</b>
50	40	150	150	<b>PBR 050/040-P</b>
50	25	150	225	<b>PBT 050/025-P</b>
80	125		<b>PB 45/080-P</b>	
80	200			<b>PB 90/080-P</b>
80	25	150	100	<b>PBR 080/025-P</b>
80	50	150	150	<b>PBR 080/050-P</b>
80	25	200	280	<b>PBT 080/025-P</b>
100	175		<b>PB 45/100-P</b>	
100	250			<b>PB 90/100-P</b>
100	25	200	100	<b>PBR 100/025-P</b>
100	50	200	150	<b>PBR 100/050-P</b>
100	80	200	175	<b>PBR 100/080-P</b>
100	25	250	330	<b>PBT 100/025-P</b>

DN1,2	DN3	L	L1	Item no.	Item no.
-	-	[mm]	[mm]	45 ° bend	90° bend
					
150		200		<b>PB 45/150-P</b>	
150		250			<b>PB 90/150-P</b>
150	50	200	150		<b>PBR 150/050-P</b>
150	80	250	175		<b>PBR 150/080-P</b>
150	25	250	340		<b>PBT 150/025-P</b>
200		200		<b>PB 45/200-P</b>	
200		300			<b>PB 90/200-P</b>
200	50	250	150		<b>PBR 200/050-P</b>
200	80	250	175		<b>PBR 200/080-P</b>
200	25	300	450		<b>PBT 200/025-P</b>
300		200		<b>PB 45/300-P</b>	
300		400			<b>PB 90/300-P</b>
300	80	300	175		<b>PBR 300/080-P</b>
300	150	350	250		<b>PBR 300/150-P</b>
300	25	400	525		<b>PBT 300/025-P</b>


**Bends 180° / U bends**

DN1,2	DN3	L	L1	Item no.	Item no.
-	-	[mm]	[mm]	U bend	U bend with outlet
					
15	15	75	125	<b>PU 015-P</b>	<b>PUO 015/015-P</b>
25	25	140	210	<b>PU 025-P</b>	<b>PUO 025/025-P</b>
40	25	180	270	<b>PU 040-P</b>	<b>PUO 040/025-P</b>
50	25	180	280	<b>PU 050-P</b>	<b>PUO 050/025-P</b>

## T AND X PIPE PIECES

T and X piece are used to merge and to separate product pipelines.

In order to make them compatible and easy to replace isosceles T and X piece have the same side length as 90° bends, and angle valves too.

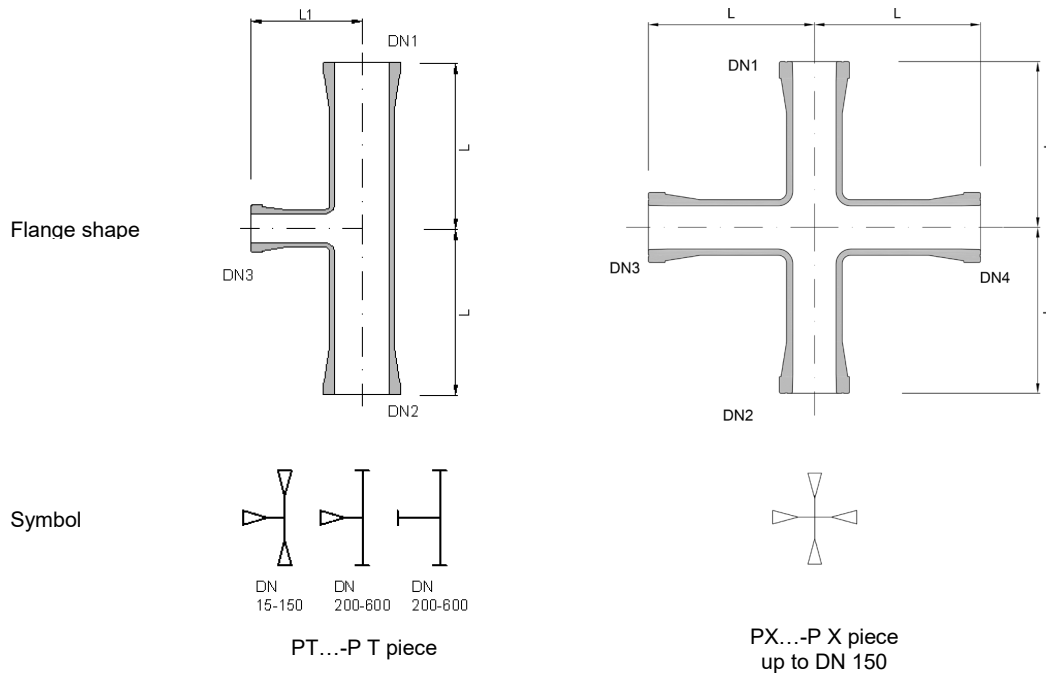


The measurements for standardised T and X piece can be seen in the following table.

We will be happy to deliver optional extras such as coatings and further flange combinations. For this you need to add the optional extra digits to the item number as given at the end of the chapter. To request a specific flange combination enter the flange you require in order, DN1, DN2, ... , according to the outline of structural components above.

Product name:	Item no.	Example
T piece, PF system:	PT DN1/DN3-P	PT 050/050-P
T piece with reducing side branch, PF system:	PT DN1/DN3-P	PT 050/050-P
T piece with reducing side branch, special:	PT DN1/DN3-F...	PT 050/025-F443
X piece, PF system:	PX DN1-P	PX 050-P
X piece, special:	PX DN1/DN2/DN3/DN4-F...	PX 050/050/025/025-F4412


DN1.2 DN3.4 L			L1	Item no.	Item no
-	-	[mm]	[mm]	T piece	X piece
					
15	15	50		<b>PT 015/015-P</b>	<b>PX 015-P</b>
25	15	75	75	<b>PT 025/015-P</b>	
25	25	100		<b>PT 025/025-P</b>	<b>PX 025-P</b>
40	15	100	75	<b>PT 040/015-P</b>	
40	25	100	75	<b>PT 040/025-P</b>	
40	40	150		<b>PT 040/040-P</b>	<b>PX 040-P</b>
50	15	100	75	<b>PT 050/015-P</b>	
50	25	100	80	<b>PT 050/025-P</b>	
50	40	100	100	<b>PT 050/040-P</b>	
50	50	150		<b>PT 050/050-P</b>	<b>PX 050-P</b>
80	25	125	100	<b>PT 080/025-P</b>	
80	40	125	100	<b>PT 080/040-P</b>	
80	50	125	115	<b>PT 080/050-P</b>	
80	80	200		<b>PT 080/080-P</b>	<b>PX 080-P</b>
100	25	125	110	<b>PT 100/025-P</b>	
100	40	125	125	<b>PT 100/040-P</b>	
100	50	125	125	<b>PT 100/050-P</b>	
100	80	150	150	<b>PT 100/080-P</b>	
100	100	250		<b>PT 100/100-P</b>	<b>PX 100-P</b>
150	25	125	150	<b>PT 150/025-P</b>	
150	40	125	150	<b>PT 150/040-P</b>	
150	50	125	150	<b>PT 150/050-P</b>	
150	80	150	175	<b>PT 150/080-P</b>	
150	100	150	200	<b>PT 150/100-P</b>	
150	150	250		<b>PT 150/150-P</b>	<b>PX 150-P</b>

DN1.2 DN3.4 L			L1	Item no.
-	-	[mm]	[mm]	T piece
				
200	25	100	175	<b>PT 200/025-P</b>
200	40	125	175	<b>PT 200/040-P</b>
200	50	125	175	<b>PT 200/050-P</b>
200	80	150	200	<b>PT 200/080-P</b>
200	100	150	225	<b>PT 200/100-P</b>
200	150	200	250	<b>PT 200/150-P</b>
200	200	300		<b>PT 200/200-P</b>
300	25	150	225	<b>PT 300/025-P</b>
300	40	200	225	<b>PT 300/040-P</b>
300	50	200	225	<b>PT 300/050-P</b>
300	80	200	240	<b>PT 300/080-P</b>
300	100	200	275	<b>PT 300/100-P</b>
300	150	250	300	<b>PT 300/150-P</b>
300	200	300	275	<b>PT 300/200-P</b>
300	300	400		<b>PT 300/300-P</b>
400	80	200	325	<b>PT 400/080-P</b>
400	150	250	350	<b>PT 400/150-P</b>
450	80	200	325	<b>PT 450/080-P</b>
450	150	250	375	<b>PT 450/150-P</b>
600	80	300	400	<b>PT 600/080-P</b>
600	150	300	450	<b>PT 600/150-P</b>
600	300	400	500	<b>PT 600/300-P</b>

**Y PIECES**

Y pieces are suitable for merging currents in pipeline construction as well as for assembling parts in vertical pipelines.

The measurements for standardised Y pieces can be seen in the following table.

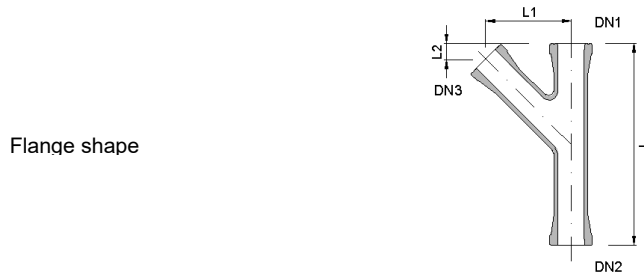

PY...-P Y piece  
up to DN 150

We will be happy to deliver optional extras such as coatings and further flange combinations. For this you need to add the optional extra digits to the item number as given at the end of the chapter. To request a specific flange combination enter the flange you require in order, DN1, DN2, ... , according to the outline above.

Product name:	Item no.	Example
Y piece, PF system:	PY DN1/DN3-P	PY 050/025-P
Y piece, special:	PY DN1/DN3-F...	PY 050/025-F443

DN 1,2DN3	Length [mm]			Item no. Y piece	
	L	L1	L2		
25	25	200	106	19	<b>PY 025/025-P</b>
40	25	225	92	83	<b>PY 040/025-P</b>
50	25	250	97	103	<b>PY 050/025-P</b>
80	25	275	121	79	<b>PY 080/025-P</b>
100	25	325	147	103	<b>PY 100/025-P</b>
150	25	325	197	101	<b>PY 150/025-P</b>






**BLIND FLANGES**

Blind flanges are normally used to block off pipelines.

The measurements of the blind flanges can be seen in the following table.

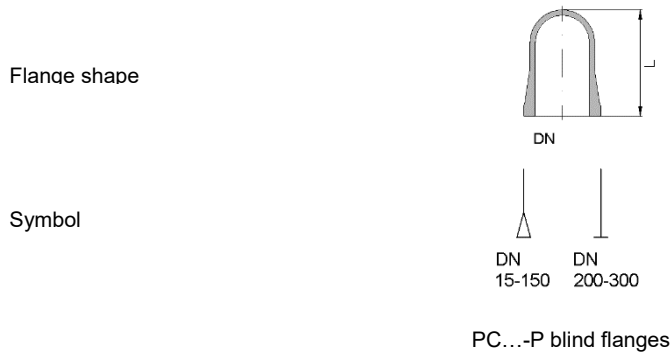

We will be happy to deliver optional extras such as coatings. For this you need to add the optional extra digits to the item number as given at the end of the chapter.

Product name:	Item no.	Example
Blind flange, PF system:	PC DN-P	PC 050-P
Blind flange, PF system, conductive coating:	PC DN-P-C3	PC 050-P-C3

DN	Length [mm] L	Item no Blind flange
15	40	<b>PC 015-P</b>
25	75	<b>PC 025-P</b>
40	75	<b>PC 040-P</b>
50	100	<b>PC 050-P</b>
80	110	<b>PC 080-P</b>
100	145	<b>PC 100-P</b>
150	125	<b>PC 150-P</b>
200	120	<b>PC 200-P</b>
300	170	<b>PC 300-P</b>


**PRODUCT HOSES**



Corrosion-proof product hoses are usually used as an alternative to glass piping when product piping needs to be changed regularly or there are very limited amounts of space.

Spiral tubes made of PTFE material with flange adaptors made of borosilicate glass 3.3 (type PHP) are suitable for glass systems. The minimum bending radius for PHP hoses is 35 mm (DN15) or 50 mm (DN25 and DN40). Standard couplings in accordance with chapter 3 can be used to form pieces with glass piping.

For applications with higher approved operating pressures and temperatures PTFE-lined hoses with stainless steel braid sleeving (PHE ...) are used as an alternative. They are smooth on the inside. When connecting to glass branches of piping it should be ensured that there is no tension. The recommended connector flange coupling for EN flanges is a CAPE connector coupling with a CGS steel core sealing gasket and ring sealing gasket in accordance with chapter 3.

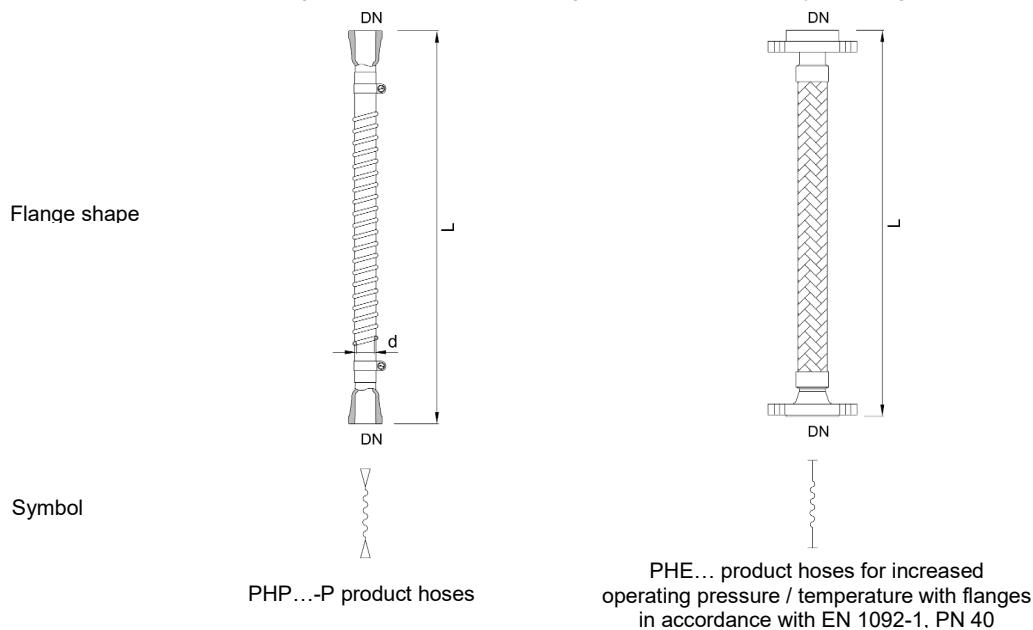In addition to the standard lengths provided, special lengths can be ordered by entering the option “-L \_ \_ \_ \_”.




DN	d (PHP)	L	Pressure range	Item no.	Pressure range	Item no.
-	[mm]	[mm]	[at 20 °C]	Product hose	[at 20 °C]	Product hose, sleeved
						
15	8	500	-1/+4	<b>PHP 15/0500-P</b>		
15	8	1000	-1/+4	<b>PHP 15/1000-P</b>		
15	8	2000	-1/+4	<b>PHP 15/2000-P</b>		
25	17	500	-1/+4	<b>PHP 25/0500-P</b>	-1/+10	<b>PHE 25/0500</b>
25	17	1000	-1/+4	<b>PHP 25/1000-P</b>	-1/+10	<b>PHE 25/1000</b>
25	17	2000	-1/+4	<b>PHP 25/2000-P</b>	-1/+10	<b>PHE 25/2000</b>
40	30	500	-1/+4	<b>PHP 40/0500-P</b>	-1/+10	<b>PHE 40/0500</b>
40	30	1000	-1/+4	<b>PHP 40/1000-P</b>	-1/+10	<b>PHE 40/1000</b>
40	30	2000	-1/+4	<b>PHP 40/2000-P</b>	-1/+10	<b>PHE 40/2000</b>

**MEDIA HOSES**

Media hoses are connected as flexible piping or connectors for non-corrosive media and most importantly for energy (steam, condensation, heat-transfer media and coolants). The corrugated tubes are lined with a sleeving and connector flanges made of stainless steel. Threaded connectors (e.g. connection to a thermostat) and insulated tube designs can also be delivered optionally. Operational conditions which differ from the standard operating conditions should be included in the order.

The hoses can be delivered in different lengths on request.

A complete coupling made of stainless steel including a sealing gasket for connection to branches of PF type glass piping is included in the delivery. To help with assembly one side contains a loose flange. The bending radius is 50 mm (without insulation) or 80 mm (with insulation).

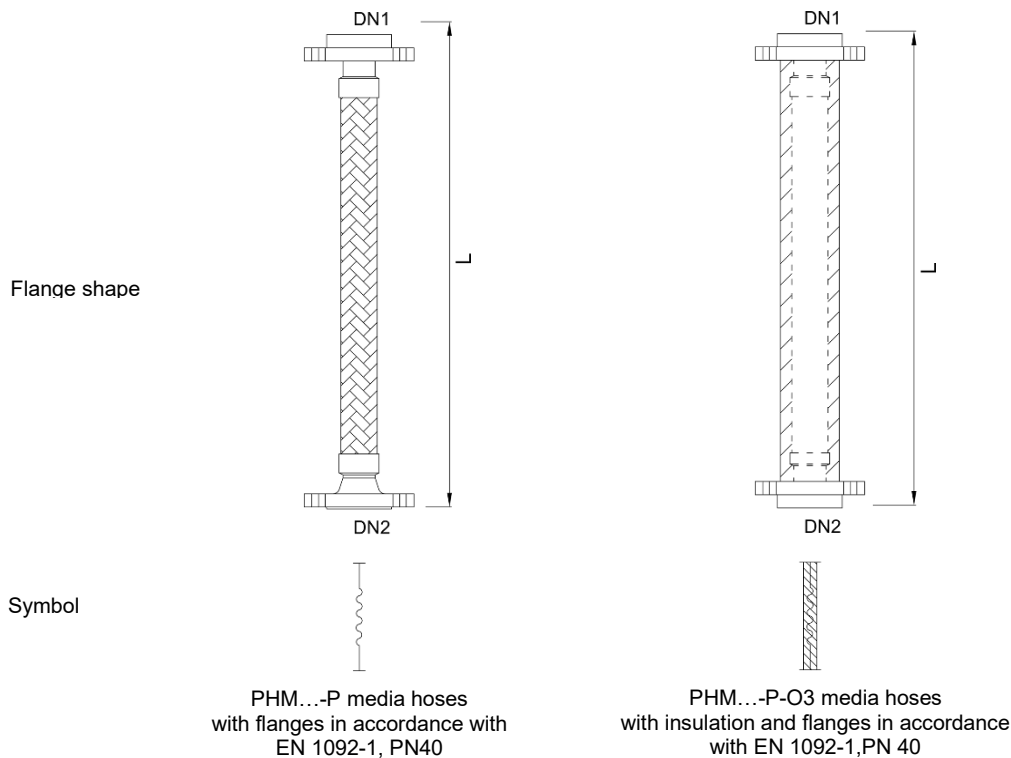

DN	L	n x d	Approved conditions	Item no.	Item no.
-	[mm]	[mm]	[barg // °C]	Media hose	Media hose, insulated
15	500	Ø65, 4 x Ø14	-1/+16 // -50/+200	PHM 15/0500-P	PHM 15/0500-P-O3
15	1000	Ø65, 4 x Ø14	-1/+16 // -50/+200	PHM 15/1000-P	PHM 15/1000-P-O3
15	2000	Ø65, 4 x Ø14	-1/+16 // -50/+200	PHM 15/2000-P	PHM 15/2000-P-O3
25	500	Ø85, 4 x Ø14	-1/+16 // -50/+200	PHM 25/0500-P	PHM 25/0500-P-O3
25	1000	Ø85, 4 x Ø14	-1/+16 // -50/+200	PHM 25/1000-P	PHM 25/1000-P-O3
25	2000	Ø85, 4 x Ø14	-1/+16 // -50/+200	PHM 25/2000-P	PHM 25/2000-P-O3

## OPTIONS PIPING AND TUBING

For piping items the following options can be chosen in addition to the standard structural components. Each option chosen must be entered at the end of the item number. Several options can be chosen and they are presented as far as possible in alphabetical order. In the following table you will find examples of item numbering for optional extras.

Product name:	Item number	Examples
Pipe section with special length, for example 265 mm:	PP DN/length-P	PP 100/0265-P
Pipe section with coating:	PP DN/length-P-C1	PP 100/0150-P-C1
Pipe section with material certificate:	PP DN/length-P-Z2	PP 100/0150-P-Z2
Pipe section with coating and material certificate:	PP DN/length-P-C1-Z2	PP 100/0150-P-C1-Z2

You can choose from the following options:

### OPTION C – COATING / GLASS TYPE

The standard components are those made of borosilicate glass 3.3 without coating. Various transparent coatings can be chosen as optional extras. Please refer to the specification on coatings in chapter 10»technical information«.

C1 = coating, non-conductive

C2 = coating, non-conductive, for high temperatures and chemical resistance.

C3 = coating, conductive

C4 = amber glass based on borosilicate glass 3.3

C5 = quartz glass<sup>1)</sup>

1) deliverable up to DN 300 with a limited product programme

### OPTION F – FLANGE TYPE

The standard component is made of borosilicate glass 3.3 with the flange type according to the article code

The standard flanges (see page 1.2) are

F1 = KF flanges, KF../1 type

F2 = KF flanges, KF../2 type

F3 = KF flanges, KF../3 type

F4 = PF flanges, PF type

All other combinations of the flange types F1 to F4 can be added as optional extras.

**OPTION L – SPECIAL LENGTHS**

Special lengths of piping can be delivered. Please enter the length you would like directly in the item number of the piping.

Special lengths of tubing can also be delivered. Please enter your preferred length according to the list of options and we will check if this is possible.

L □□□□ = special length L in mm, e.g. L0235 for 235 mm length

**OPTION M – MATERIAL / PTFE-DESIGN**

White virginal non-conductive PTFE material is used for components made of PTFE or for constructions containing PTFE which come into contact with products.

The following alternatives can also be delivered:

M1 = PTFE conductive

M2 = PTFE conductive with earthing

**OPTION O – SPECIAL OPTIONS**

The following special options are offered for certain structural components.

O1 = pipe sections type PP with continuous minimal inner diameter according nominal bore for structured packings

O2 = pipe sections type PP with calibrated inner diameter

O3 = insulation (only for temperature tubes)

**OPTION Z – CERTIFICATES**

Standard deliveries do not come with certificates.

The following certificates can optionally be delivered with your order.

Z1 = FDA-material certificate<sup>1)</sup>

Z2 = material certificate 2.2

Z3 = Certificate for Technical Guidelines on Air Quality Control (TA-Luft)

1) FDA material certificates can be delivered for product-side structural components containing PTFE.